
RF Single Color Remote Controller

70010013

Important: *Read All Instructions Prior to Installation*

Function introduction

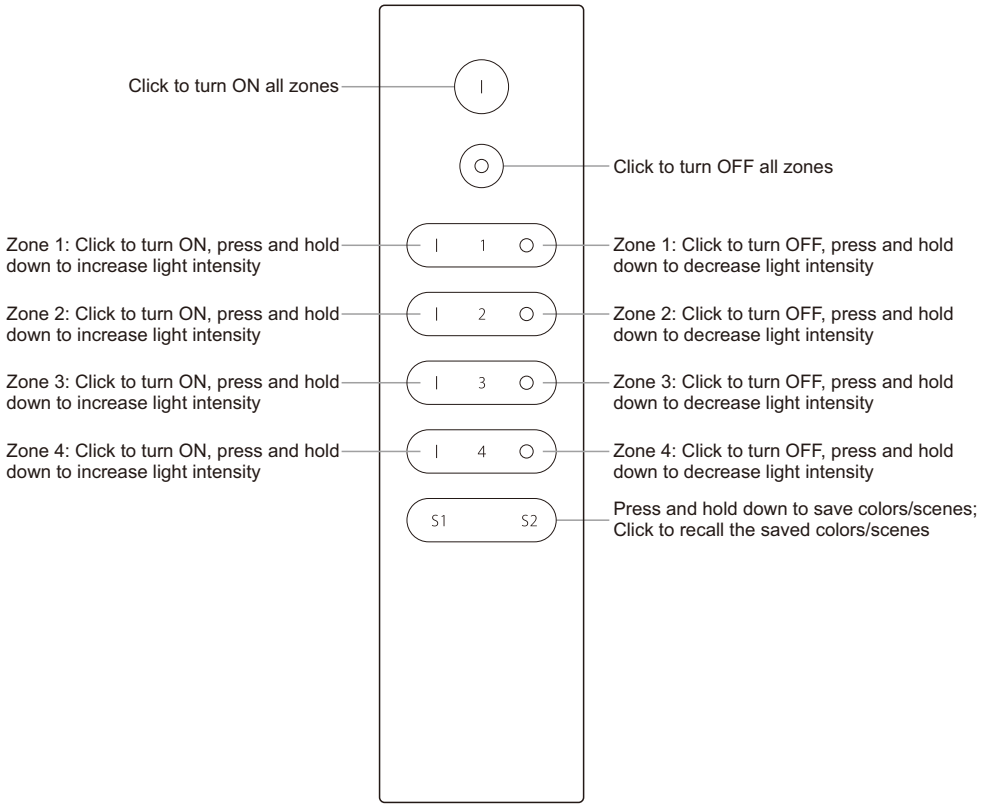

Front side




Note:Before the first use, please remove the protective film on the battery.

Back side

Product Data

Output	RF signal
Operation Frequency	869.5/916.5/434MHz
Power Supply	3V(1xCR2032 battery)
Operating temperature	0-40°C
Relative humidity	8% to 80%
Dimensions	150x38.6x12mm

- Control 4 zones of receivers separately
- Single color controller
- Compatible with all universal series RF receivers
- 1 receiver can be paired by max 8 different remote controls.
- Waterproof grade: IP20

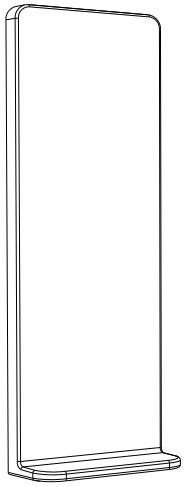


Magnetic Bracket

Safety & Warnings

- This device contains a button lithium battery that shall be stored and disposed properly.
- DO NOT expose the device to moisture.

Pair with RF receiver

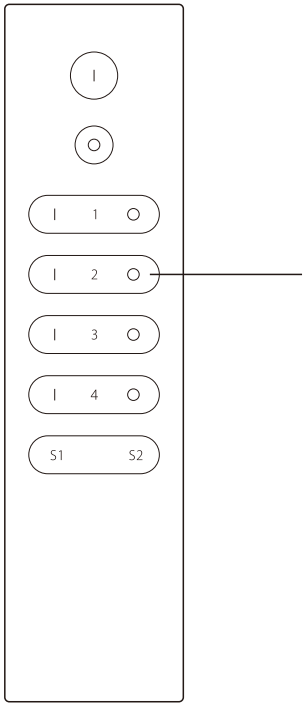

Step 1: Do wiring the RF receiver according to wiring diagram(please refer to the instruction of RF receiver that you would like to pair with.



Step 2: Click the "**Learning Key**" button on RF receiver or re-power on the receiver three times continuously to set it into pairing status

Step 3: Choose one zone and click I or O of the zone(e.g. zone 2), LED lights connected with the RF receiver flicker once means the receiver is paired with zone 2 successfully.

Note: one receiver can be paired with max 8 remote controls.

If you use multiple receivers, you have two choices:
Option 1: have all the receivers in the same zone, like zone 1
Option 2: have all the receivers in different zones, like zone 1, zone 2, zone 3 and zone 4

Battery Warnings & Safty

Warnings and Statements:

This product contains a CR Coin Cell Lithium Battery and meets the requirements of the **16 CFR Part 1263**. For your safety and to ensure proper operation, please carefully read and understand the following warnings and statements.

⚠WARNING

- **INGESTION HAZARD**: This product contains a button cell or coin battery.
- **DEATH** or serious injury can occur if ingested.
- A swallowed button cell or coin battery can cause **Internal Chemical Burns** in as little as **2 hours.**
- **KEEP** new and used batteries **OUT OF REACH of CHILDREN**
- **Seek immediate medical attention** if a battery is suspected to be swallowed or inserted inside any part of the body.



Statements:

• INDOOR USE ONLY
• Remove and immediately recycle or dispose of used batteries according to local regulations and keep away from children. Do NOT dispose of batteries in household trash or incinerate.
• Even used batteries may cause severe injury or death.
• Call a local poison control center for treatment information.
• Do not install any battery other than CR2032 or its equivalent.
• Ensure the CR2032 operates at the nominal battery voltage (3VDC).
• Non-rechargeable batteries are not to be recharged.
• Do not force discharge, recharge, disassemble, heat above (manufacturer's specified temperature rating) or incinerate. Doing so may result in injury due to venting, leakage or explosion resulting in chemical burns.
• Ensure the batteries are installed correctly according to polarity (+ and -).
• Do not mix old and new batteries, different brands or types of batteries, such as alkaline, carbon-zinc, or rechargeable batteries.
• Remove and immediately recycle or dispose of batteries from equipment not used for an extended period of time according to local regulations.
• Always completely secure the battery compartment. If the battery compartment does not close securely, stop using the product, remove the batteries, and keep them away from children.
• If the battery leaks, do not touch or smell it, wipe the leakage from the battery compartment, and thenreplace the battery with a new one.
• If a battery leaks and the material contacts your skin or clothing, flush the exposed area thoroughly withrunning water. In case of eye contact, flush thoroughly with copious amounts of clean running water andseek immediate medical assistance.


Battery information:

Battery	Battery Type	Operation Voltage	Diameter
CR2032	Button Cell	3VDC	20mm(0.787inch)


How to install or replace a battery:

This product is designed with a battery compartment that is secured to prevent unauthorized access, especially by children.This safety feature ensures that the battery remains safely enclosed, minimizing the risk of accidental removal or exposure.


1. Use a right screwdriver to unscrew and remove the screw.

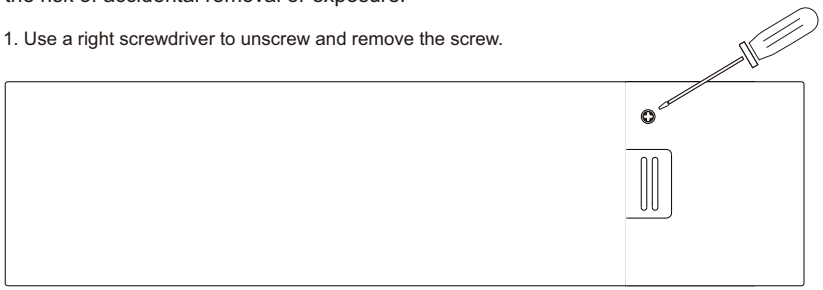

2. Press and hold down, then push the rib to unlock the battery compartment cap.

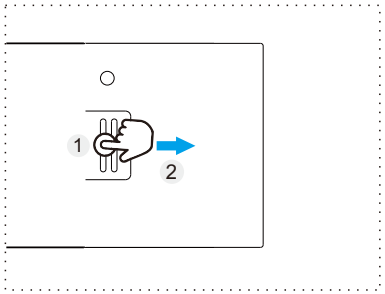

3. Pull out the cap, then take out the battery.

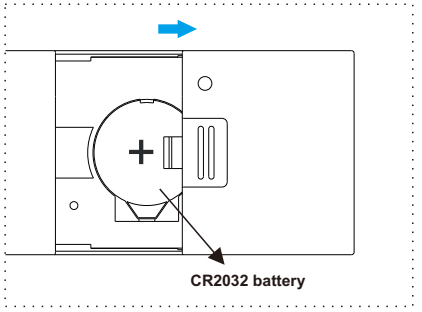

BATTERY	Description
+	 Note to distinguish between the + or - of the battery.
-	

4.Note to distinguish between the + or - of the battery, install the new battery in the battery compartment correctly, and push the compartment into the sensor, then check and make sure that the battery compartment got locked and secured.

Disposing of used batteries:

• When disposing of used batteries, please comply with governmental regulations or environmental public institutions' rules that apply in your country/area.
• Note and follow the **STATEMENTS** in **WARNINGS AND STATEMENTS**.