Fixture MI-BUBBLE-02

Ref. FPMI002



IP20

- Module for building shapes MI-BUBBLES in the MIFOR-70 system
- Also applicable as a standalone lighting fixture
- Includes a light source and a wire suspension system
- Easy suspension height adjustment
- ETL Sanitation Listed

TECHNICAL DRAWING

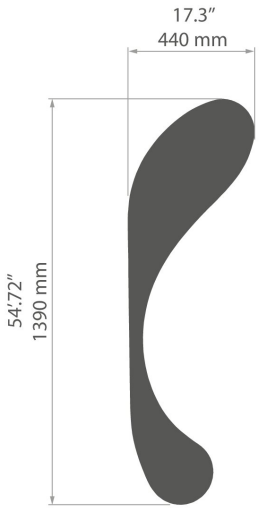

TECHNICAL SPECIFICATIONS

Material	**aluminum**
Cover	**frosted**
Control	**ON/OFF**
Mounting type	**suspended**
Length [L]	**54.7"**
Height [H]	**3.4"**
Width [W]	**17.3"**
Weight	**8.1 lb**
Lighting direction	**down**
IP protection rating	**20**
Luminare power	**57 W**
Color Rendering Index CRI	**90**
MacAdam's ellipse	**3 SDCM**

Color	Luminous flux of the fixture	Efficiency	Color temperature	Ref
silver anodized	4950 lm	86 lm/W	3000 K	**FPMI002-01300B**
silver anodized	5130 lm	90 lm/W	4000 K	**FPMI002-01400B**
black anodized	4950 lm	86 lm/W	3000 K	**FPMI002-07300B**
black anodized	5130 lm	90 lm/W	4000 K	**FPMI002-07400B**
white lacquered mat	4950 lm	86 lm/W	3000 K	**FPMI002-10300B**
white lacquered mat	5130 lm	90 lm/W	4000 K	**FPMI002-10400B**

Fixture MI-BUBBLE-02

Ref. FPMI002

Input voltage	**24 V**
Protection class	**III**
Working temperature	**50°F - 95°F**

SAMPLE PROJECTS





