Fixture MI-MOON

Ref. FPMI021



IP20

- MI-MOON lighting fixture, built in the MIFOR-70 system
- Includes a light source and a wire suspension system
- Easy assembly
- Easy suspension height adjustment
- ETL Sanitation Listed

TECHNICAL DRAWING

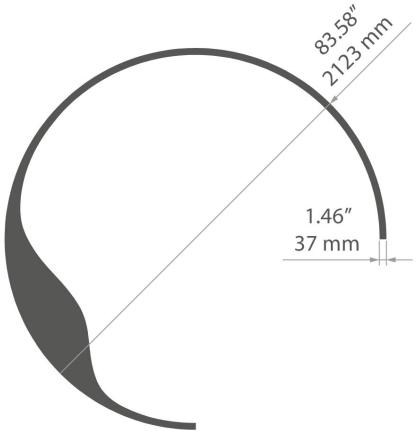

TECHNICAL SPECIFICATIONS

Material	**aluminum**
Cover	**frosted**
Control	**ON/OFF**
Mounting type	**suspended**
Length [L]	**83.6"**
Height [H]	**3.4"**
Weight	**16.2 lb**
Lighting direction	**down**
IP protection rating	**20**
Luminare power	**107 W**
Color Rendering Index CRI	**90**
MacAdam's ellipse	**3 SDCM**
Input voltage	**24 V**

Color	Luminous flux of the fixture	Efficiency	Color temperature	Ref
silver anodized	7350 lm	68 lm/W	3000 K	**FPMI021-01300B**
silver anodized	7630 lm	71 lm/W	4000 K	**FPMI021-01400B**
black anodized	7350 lm	68 lm/W	3000 K	**FPMI021-07300B**
black anodized	7630 lm	71 lm/W	4000 K	**FPMI021-07400B**
white lacquered mat	7350 lm	68 lm/W	3000 K	**FPMI021-10300B**
white lacquered mat	7630 lm	71 lm/W	4000 K	**FPMI021-10400B**

Fixture MI-MOON

Ref. FPMI021

Protection class	III
Working temperature	50°F - 95°F

SAMPLE PROJECTS





