Fixture MI-SAIL-AL

Ref. FPMI033

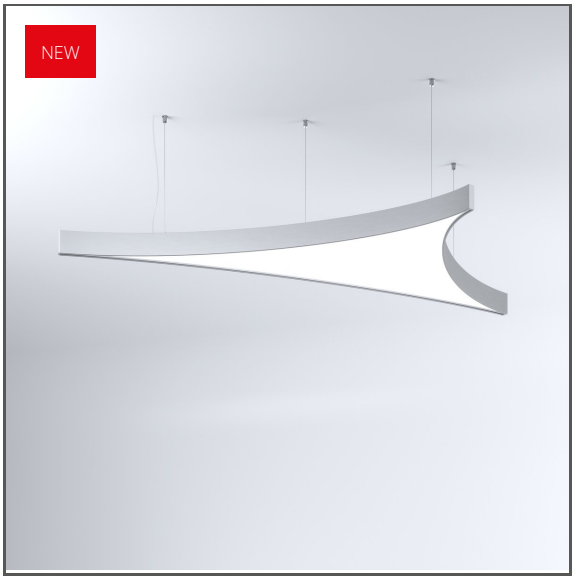

IP20

- MI-SAIL-AL lighting fixture, built in the MIFOR-70 system
- Includes a light source and a wire suspension system
- Easy assembly
- Easy suspension height adjustment
- ETL Sanitation Listed

TECHNICAL DRAWING

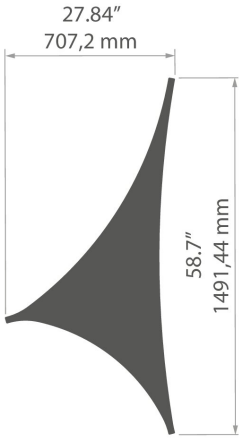

TECHNICAL SPECIFICATIONS

Material	**aluminum**
Cover	**frosted**
Control	**ON/OFF**
Mounting type	**suspended**
Length [L]	**58.7"**
Height [H]	**3.4"**
Width [W]	**27.8"**
Weight	**8.5 lb**
Lighting direction	**down**
IP protection rating	**20**
Luminare power	**70 W**
Color Rendering Index CRI	**90**
MacAdam's ellipse	**3 SDCM**

Color	Luminous flux of the fixture	Efficiency	Color temperature	Ref
silver anodized	5140 lm	73 lm/W	3000 K	**FPMI033-01300B**
silver anodized	5330 lm	76 lm/W	4000 K	**FPMI033-01400B**
black anodized	5140 lm	73 lm/W	3000 K	**FPMI033-07300B**
black anodized	5330 lm	76 lm/W	4000 K	**FPMI033-07400B**
white lacquered mat	5140 lm	73 lm/W	3000 K	**FPMI033-10300B**
white lacquered mat	5330 lm	76 lm/W	4000 K	**FPMI033-10400B**

Fixture MI-SAIL-AL

Ref. FPMI033

Input voltage	24 V
Protection class	III
Working temperature	50°F - 95°F

SAMPLE PROJECTS





