Fixture COLMEIA M

Ref. FPCLM00



CRI 90+ | IP20 | CE | UKCA | RoHS COMPLIANT

TECHNICAL DRAWING

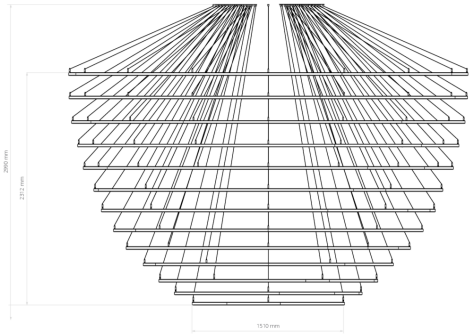

TECHNICAL SPECIFICATIONS

Material	**aluminum**
Cover	**frosted**
Length [L]	**3960 mm**
Width [W]	**3960 mm**
Lighting direction	**side emitting**
IP protection rating	**20**
Luminare power	**3110 W**
LxBy	**L80B50**
Lifetime	**60000 h**
Color Rendering Index CRI	**90**
MacAdam's ellipse	**3 SDCM**
Input voltage	**220-240 V 50/60 Hz**

Color	Control	Mounting type	Height H	Luminous flux of the fixture	Efficiency	Color temperature	Ref
silver anodized	DALI	Suspended	2290 mm	255900 lm	82 lm/W	3000 K	**FPCLM001-0130DB**
silver anodized	ON/OFF	Suspended	2290 mm	255900 lm	82 lm/W	3000 K	**FPCLM001-0130EB**

Fixture COLMEIA M

Ref. FPCLM00

Color	Control	Mounting type	Height H	Luminous flux of the fixture	Efficiency	Color temperature	Ref
silver anodized	DALI	Suspended	2290 mm	282500 lm	91 lm/W	4000 K	**FPCLM001-0140DB**
silver anodized	ON/OFF	Suspended	2290 mm	282500 lm	91 lm/W	4000 K	**FPCLM001-0140EB**
black anodized	DALI	Suspended	2290 mm	255900 lm	82 lm/W	3000 K	**FPCLM001-0730DB**
black anodized	ON/OFF	Suspended	2290 mm	255900 lm	82 lm/W	3000 K	**FPCLM001-0730EB**
black anodized	DALI	Suspended	2290 mm	282500 lm	91 lm/W	4000 K	**FPCLM001-0740DB**
black anodized	ON/OFF	Suspended	2290 mm	282500 lm	91 lm/W	4000 K	**FPCLM001-0740EB**
white lacquered	DALI	Suspended	2290 mm	255900 lm	82 lm/W	3000 K	**FPCLM001-1030DB**
white lacquered	ON/OFF	Suspended	2290 mm	255900 lm	82 lm/W	3000 K	**FPCLM001-1030EB**
white lacquered	DALI	Suspended	2290 mm	282500 lm	91 lm/W	4000 K	**FPCLM001-1040DB**
white lacquered	ON/OFF	Suspended	2290 mm	282500 lm	91 lm/W	4000 K	**FPCLM001-1040EB**
silver anodized	DALI	suspended with surface-mounted base	2290 mm	255900 lm	82 lm/W	3000 K	**FPCLM002-0130DB**
silver anodized	ON/OFF	suspended with surface-mounted base	2290 mm	255900 lm	82 lm/W	3000 K	**FPCLM002-0130EB**
silver anodized	DALI	suspended with surface-mounted base	2290 mm	282500 lm	91 lm/W	4000 K	**FPCLM002-0140DB**
silver anodized	ON/OFF	suspended with surface-mounted base	2290 mm	282500 lm	91 lm/W	4000 K	**FPCLM002-0140EB**
black anodized	DALI	suspended with surface-mounted base	2290 mm	255900 lm	82 lm/W	3000 K	**FPCLM002-0730DB**
black anodized	ON/OFF	suspended with surface-mounted base	2290 mm	255900 lm	82 lm/W	3000 K	**FPCLM002-0730EB**
black anodized	DALI	suspended with surface-mounted base	2290 mm	282500 lm	91 lm/W	4000 K	**FPCLM002-0740DB**
black anodized	ON/OFF	suspended with surface-mounted base	2290 mm	282500 lm	91 lm/W	4000 K	**FPCLM002-0740EB**
white lacquered	DALI	suspended with surface-mounted base	2290 mm	255900 lm	82 lm/W	3000 K	**FPCLM002-1030DB**
white lacquered	ON/OFF	suspended with surface-mounted base	2290 mm	255900 lm	82 lm/W	3000 K	**FPCLM002-1030EB**
white lacquered	DALI	suspended with surface-mounted base	2290 mm	282500 lm	91 lm/W	4000 K	**FPCLM002-1040DB**
white lacquered	ON/OFF	suspended with surface-mounted base	2290 mm	282500 lm	91 lm/W	4000 K	**FPCLM002-1040EB**
silver anodized	DALI	Suspended with a pendant base	3000 mm	255900 lm	82 lm/W	3000 K	**FPCLM003-0130DB**
silver anodized	ON/OFF	Suspended with a pendant base	3000 mm	255900 lm	82 lm/W	3000 K	**FPCLM003-0130EB**
silver anodized	DALI	Suspended with a pendant base	3000 mm	282500 lm	91 lm/W	4000 K	**FPCLM003-0140DB**
silver anodized	ON/OFF	Suspended with a pendant base	3000 mm	282500 lm	91 lm/W	4000 K	**FPCLM003-0140EB**
black anodized	DALI	Suspended with a pendant base	3000 mm	255900 lm	82 lm/W	3000 K	**FPCLM003-0730DB**
black anodized	ON/OFF	Suspended with a pendant base	3000 mm	255900 lm	82 lm/W	3000 K	**FPCLM003-0730EB**
black anodized	DALI	Suspended with a pendant base	3000 mm	282500 lm	91 lm/W	4000 K	**FPCLM003-0740DB**
black anodized	ON/OFF	Suspended with a pendant base	3000 mm	282500 lm	91 lm/W	4000 K	**FPCLM003-0740EB**
white lacquered	DALI	Suspended with a pendant base	3000 mm	255900 lm	82 lm/W	3000 K	**FPCLM003-1030DB**
white lacquered	ON/OFF	Suspended with a pendant base	3000 mm	255900 lm	82 lm/W	3000 K	**FPCLM003-1030EB**

Fixture COLMEIA M

Ref. FPCLM00

Color	Control	Mounting type	Height H	Luminous flux of the fixture	Efficiency	Color temperature	Ref
☐ white lacquered	DALI	Suspended with a pendant base	3000 mm	282500 lm	91 lm/W	4000 K	**FPCLM003-1040DB**
☐ white lacquered	ON/OFF	Suspended with a pendant base	3000 mm	282500 lm	91 lm/W	4000 K	**FPCLM003-1040EB**

SAMPLE PROJECTS

