Fixture COLMEIA L

Ref. FPCLL00



CRI 90+ | IP20 | CE | UKCA | RoHS COMPLIANT | ETL US Intertek

- Pendant light with organic shapes inspired by the structure of a wild beehive
- Kinetic light structures resembling concentric rings
- Side lighting with a frosted cover ensuring even light distribution
- High color rendering index CRI 90
- Available in three sizes: S (1980mm), M (3960mm), L (5940mm)
- Three basic color finishes and two control options
- Customizable dimensions and finishes

TECHNICAL DRAWING

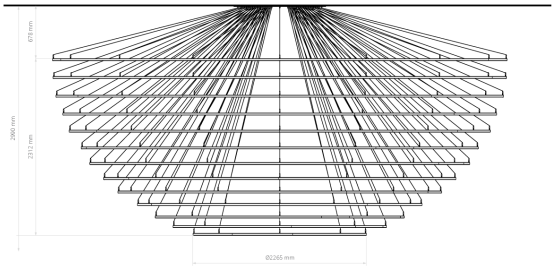

TECHNICAL SPECIFICATIONS

Material	**aluminum**
Cover	**frosted**
Control	**ON/OFF**
Length [L]	**19'05"**
Width [W]	**19'05"**
Lighting direction	**side emitting**
IP protection rating	**20**
Luminare power	**4665 W**
LxBy	**L80B50**
Lifetime	**60000 h**
Color Rendering Index CRI	**90**
MacAdam's ellipse	**3 SDCM**
Input voltage	-

https://klusdesign.com, quotations@klusdesign.com
KLUŚ LLC, 673 US Highway 1, Vero Beach, FL 32962

Fixture COLMEIA L

Ref. FPCLL00

Color	Mounting type	Height [H]	Luminous flux of the fixture	Efficiency	Color temperature	Ref
silver anodized	Suspended	90.2"	383800 lm	82 lm/W	3000 K	**FPCLL001-0130EB**
silver anodized	Suspended	90.2"	423800 lm	91 lm/W	4000 K	**FPCLL001-0140EB**
black anodized	Suspended	90.2"	383800 lm	82 lm/W	3000 K	**FPCLL001-0730EB**
black anodized	Suspended	90.2"	423800 lm	91 lm/W	4000 K	**FPCLL001-0740EB**
white lacquered	Suspended	90.2"	383800 lm	82 lm/W	3000 K	**FPCLL001-1030EB**
white lacquered	Suspended	90.2"	423800 lm	91 lm/W	4000 K	**FPCLL001-1040EB**
silver anodized	suspended with surface-mounted base	90.2"	383800 lm	82 lm/W	3000 K	**FPCLL002-0130EB**
silver anodized	suspended with surface-mounted base	90.2"	423800 lm	91 lm/W	4000 K	**FPCLL002-0140EB**
black anodized	suspended with surface-mounted base	90.2"	383800 lm	82 lm/W	3000 K	**FPCLL002-0730EB**
black anodized	suspended with surface-mounted base	90.2"	423800 lm	91 lm/W	4000 K	**FPCLL002-0740EB**
white lacquered	suspended with surface-mounted base	90.2"	383800 lm	82 lm/W	3000 K	**FPCLL002-1030EB**
white lacquered	suspended with surface-mounted base	90.2"	423800 lm	91 lm/W	4000 K	**FPCLL002-1040EB**
silver anodized	Suspended with a pendant base	118.1"	383800 lm	82 lm/W	3000 K	**FPCLL003-0130EB**
silver anodized	Suspended with a pendant base	118.1"	423800 lm	91 lm/W	4000 K	**FPCLL003-0140EB**
black anodized	Suspended with a pendant base	118.1"	383800 lm	82 lm/W	3000 K	**FPCLL003-0730EB**
black anodized	Suspended with a pendant base	118.1"	423800 lm	91 lm/W	4000 K	**FPCLL003-0740EB**
white lacquered	Suspended with a pendant base	118.1"	383800 lm	82 lm/W	3000 K	**FPCLL003-1030EB**
white lacquered	Suspended with a pendant base	118.1"	423800 lm	91 lm/W	4000 K	**FPCLL003-1040EB**

SAMPLE PROJECTS



