Fixture HELIX M

Ref. FPHLM00



CRI 90+ | IP20 | CE | UKCA | RoHS COMPLIANT

TECHNICAL DRAWING

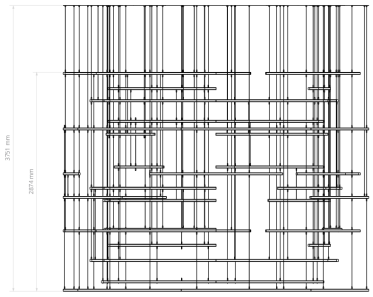

TECHNICAL SPECIFICATIONS

Material	**aluminum**
Cover	**frosted**
Length [L]	**4000 mm**
Width [W]	**4000 mm**
Lighting direction	**side emitting**
IP protection rating	**20**
Luminare power	**4720 W**
LxBy	**L80B50**
Lifetime	**60000 h**
Color Rendering Index CRI	**90**
MacAdam's ellipse	**3 SDCM**
Input voltage	**220-240 V 50/60 Hz**

Color	Control	Mounting type	Luminous flux of the fixture	Efficiency	Color temperature	Ref
silver anodized	DALI	Suspended	388600 lm	82 lm/W	3000 K	**FPHLM001-0130DB**
silver anodized	ON/OFF	Suspended	388600 lm	82 lm/W	3000 K	**FPHLM001-0130EB**
silver anodized	DALI	Suspended	429200 lm	91 lm/W	4000 K	**FPHLM001-0140DB**

Fixture HELIX M

Ref. FPHLM00

Color	Control	Mounting type	Luminous flux of the fixture	Efficiency	Color temperature	Ref
silver anodized	ON/OFF	Suspended	429200 lm	91 lm/W	4000 K	**FPHLM001-0140EB**
black anodized	DALI	Suspended	388600 lm	82 lm/W	3000 K	**FPHLM001-0730DB**
black anodized	ON/OFF	Suspended	388600 lm	82 lm/W	3000 K	**FPHLM001-0730EB**
black anodized	DALI	Suspended	429200 lm	91 lm/W	4000 K	**FPHLM001-0740DB**
black anodized	ON/OFF	Suspended	429200 lm	91 lm/W	4000 K	**FPHLM001-0740EB**
white lacquered	DALI	Suspended	388600 lm	82 lm/W	3000 K	**FPHLM001-1030DB**
white lacquered	ON/OFF	Suspended	388600 lm	82 lm/W	3000 K	**FPHLM001-1030EB**
white lacquered	DALI	Suspended	429200 lm	91 lm/W	4000 K	**FPHLM001-1040DB**
white lacquered	ON/OFF	Suspended	429200 lm	91 lm/W	4000 K	**FPHLM001-1040EB**
silver anodized	DALI	suspended with surface-mounted base	388600 lm	82 lm/W	3000 K	**FPHLM002-0130DB**
silver anodized	ON/OFF	suspended with surface-mounted base	388600 lm	82 lm/W	3000 K	**FPHLM002-0130EB**
silver anodized	DALI	suspended with surface-mounted base	429200 lm	91 lm/W	4000 K	**FPHLM002-0140DB**
silver anodized	ON/OFF	suspended with surface-mounted base	429200 lm	91 lm/W	4000 K	**FPHLM002-0140EB**
black anodized	DALI	suspended with surface-mounted base	388600 lm	82 lm/W	3000 K	**FPHLM002-0730DB**
black anodized	ON/OFF	suspended with surface-mounted base	388600 lm	82 lm/W	3000 K	**FPHLM002-0730EB**
black anodized	DALI	suspended with surface-mounted base	429200 lm	91 lm/W	4000 K	**FPHLM002-0740DB**
black anodized	ON/OFF	suspended with surface-mounted base	429200 lm	91 lm/W	4000 K	**FPHLM002-0740EB**
white lacquered	DALI	suspended with surface-mounted base	388600 lm	82 lm/W	3000 K	**FPHLM002-1030DB**
white lacquered	ON/OFF	suspended with surface-mounted base	388600 lm	82 lm/W	3000 K	**FPHLM002-1030EB**
white lacquered	DALI	suspended with surface-mounted base	429200 lm	91 lm/W	4000 K	**FPHLM002-1040DB**
white lacquered	ON/OFF	suspended with surface-mounted base	429200 lm	91 lm/W	4000 K	**FPHLM002-1040EB**
silver anodized	DALI	Suspended with a pendant base	388600 lm	82 lm/W	3000 K	**FPHLM003-0130DB**
silver anodized	ON/OFF	Suspended with a pendant base	388600 lm	82 lm/W	3000 K	**FPHLM003-0130EB**
silver anodized	DALI	Suspended with a pendant base	429200 lm	91 lm/W	4000 K	**FPHLM003-0140DB**
silver anodized	ON/OFF	Suspended with a pendant base	429200 lm	91 lm/W	4000 K	**FPHLM003-0140EB**
black anodized	DALI	Suspended with a pendant base	388600 lm	82 lm/W	3000 K	**FPHLM003-0730DB**
black anodized	ON/OFF	Suspended with a pendant base	388600 lm	82 lm/W	3000 K	**FPHLM003-0730EB**
black anodized	DALI	Suspended with a pendant base	429200 lm	91 lm/W	4000 K	**FPHLM003-0740DB**
black anodized	ON/OFF	Suspended with a pendant base	429200 lm	91 lm/W	4000 K	**FPHLM003-0740EB**
white lacquered	DALI	Suspended with a pendant base	388600 lm	82 lm/W	3000 K	**FPHLM003-1030DB**
white lacquered	ON/OFF	Suspended with a pendant base	388600 lm	82 lm/W	3000 K	**FPHLM003-1030EB**
white lacquered	DALI	Suspended with a pendant base	429200 lm	91 lm/W	4000 K	**FPHLM003-1040DB**
white lacquered	ON/OFF	Suspended with a pendant base	429200 lm	91 lm/W	4000 K	**FPHLM003-1040EB**

Fixture HELIX M

Ref. FPHLM00

SAMPLE PROJECTS

