Fixture STALALIGHT M-WALL



CRI 90+ | IP20 | CE | UKCA | RoHS COMPLIANT

- The contrast of light and shadow creates a unique interior atmosphere
- Possibility of creating impressive lighting compositions through multiplication
- Flexible installation – wall or ceiling mounting with 360° fixture rotation
- Two size variants – larger light surface or subtle minimalism
- Quick installation in plasterboard

TECHNICAL DRAWING

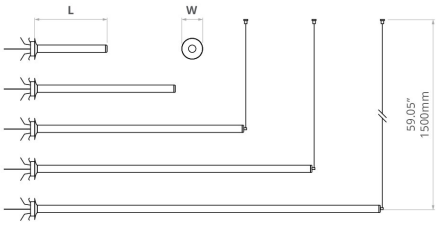

TECHNICAL SPECIFICATIONS

Material	aluminum
Cover	satin
Mounting type	Surface mounted
Width [W]	90.4 mm
IP protection rating	20
Color Rendering Index CRI	90
MacAdam's ellipse	3 SDCM
Input voltage	24 V
Protection class	III
Building type	Commercial, Residential, HoReCa object, Retail, Entertainment/ Arts
Facility zone	conference room, lobby / foyer, wall lighting

Fixture STALALIGHT M-WALL

Color	Length [L]	Luminous flux of the fixture	Luminare power	Efficiency	Color temperature	Ref
black lacquered	619 mm	830 lm	11.5 W	72 lm/W	3000 K	**FNJD009-07300B**
black lacquered	619 mm	880 lm	11.5 W	77 lm/W	4000 K	**FNJD009-07400B**
white lacquered	619 mm	830 lm	11.5 W	72 lm/W	3000 K	**FNJD009-10300B**
white lacquered	619 mm	880 lm	11.5 W	77 lm/W	4000 K	**FNJD009-10400B**
black lacquered	919 mm	1250 lm	17.3 W	72 lm/W	3000 K	**FNJD010-07300B**
black lacquered	919 mm	1320 lm	17.3 W	76 lm/W	4000 K	**FNJD010-07400B**
white lacquered	919 mm	1250 lm	17.3 W	72 lm/W	3000 K	**FNJD010-10300B**
white lacquered	919 mm	1320 lm	17.3 W	76 lm/W	4000 K	**FNJD010-10400B**
black lacquered	1219 mm	1660 lm	23 W	72 lm/W	3000 K	**FNJD011-07300B**
black lacquered	1219 mm	1770 lm	23 W	77 lm/W	4000 K	**FNJD011-07400B**
white lacquered	1219 mm	1660 lm	23 W	72 lm/W	3000 K	**FNJD011-10300B**
white lacquered	1219 mm	1770 lm	23 W	77 lm/W	4000 K	**FNJD011-10400B**
black lacquered	208 mm	280 lm	3.8 W	74 lm/W	3000 K	**FNJD012-07300B**
black lacquered	208 mm	300 lm	3.8 W	79 lm/W	4000 K	**FNJD012-07400B**
white lacquered	208 mm	280 lm	3.8 W	74 lm/W	3000 K	**FNJD012-10300B**
white lacquered	208 mm	300 lm	3.8 W	79 lm/W	4000 K	**FNJD012-10400B**
black lacquered	308 mm	420 lm	5.8 W	72 lm/W	3000 K	**FNJD013-07300B**
black lacquered	308 mm	440 lm	5.8 W	76 lm/W	4000 K	**FNJD013-07400B**
white lacquered	308 mm	420 lm	5.8 W	72 lm/W	3000 K	**FNJD013-10300B**
white lacquered	308 mm	440 lm	5.8 W	76 lm/W	4000 K	**FNJD013-10400B**

SAMPLE PROJECTS





RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM

Name	IP protection rating	Ref.
Controller LED Casambi CBU-ASD	20	E62147

Fixture STALALIGHT M-WALL

Name	IP protection rating	Ref.
Controller LED Casambi CBU-PWM4	20	E62148

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS

Name	IP protection rating	Ref.
Controller RGB+CCT, Wlightbox NEW	20	E60235
Controller LED MONO\CCT\RGB\RGBW\RGBW+CCT, 5w1, SR5 NEW	20	E62159
Controller LED MONO, Wlightboxs 120W IP20	20	E60228